


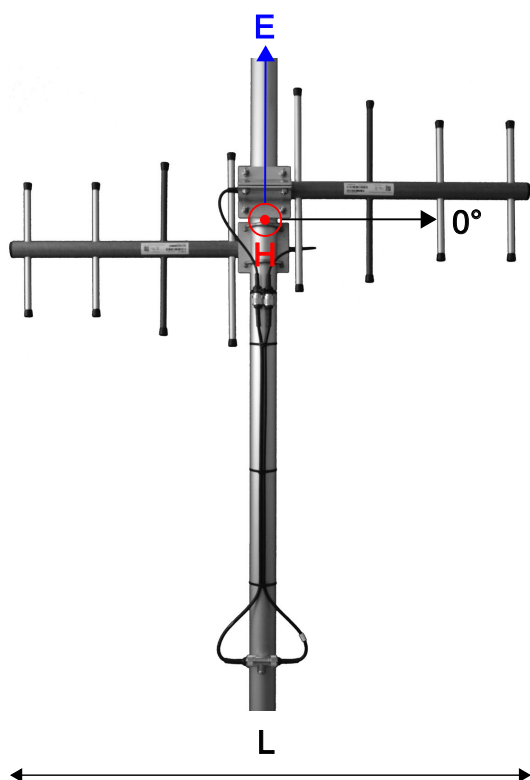

FREQUENCY INDEPENDENT DATA

Description: directional end fire yagi array,
field adjustable pattern

Frequency: 135-145 MHz, 144-156 MHz,
154-166 MHz, 163-177 MHz,
221-239 MHz, 326-353 MHz,
336-364 MHz, 365-395 MHz,
380-410 MHz, 405-440 MHz,
440-475 MHz

Impedance: 50 ohm

Gain: 7 dBi

H -3 dB: 75°

E -3 dB: 59°

F/B: 0 dB

Polarization: vertical/horizontal

Connector: N-female/TNC-female

VSWR: < 1.5

Radome: UV resistant ABS/FG,
RAL 7012, PU foam filling

Radiator: copper

Passive

elements: coated aluminium


Attachment: Ø 35-60 mm, aluminium alloy
bracket, stainless steel V-bolts
and self-locking nuts

Lightning

protection: DC-short circuited

Temperature: -40°C - +80°C

IP: 67

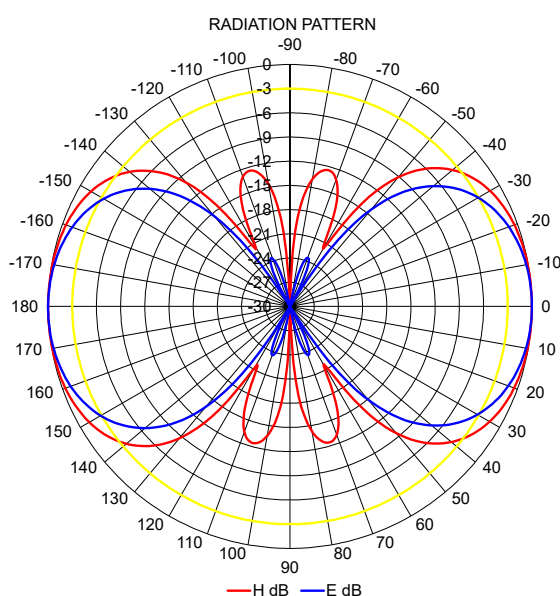

HCM 038DE25 030LA07

- combination of durability, light weight and low wind load
- radome enclosed radiator
- IP67 proof construction
- all electromechanics moulded inside of closed cell PU foam
- DC shorted feed point
- integrated impedance compensation
- integrated RF choke

CAF2+ DIRECTIONAL END FIRE YAGI ARRAY