


CS 1 to 2 power splitter

Installation instructions

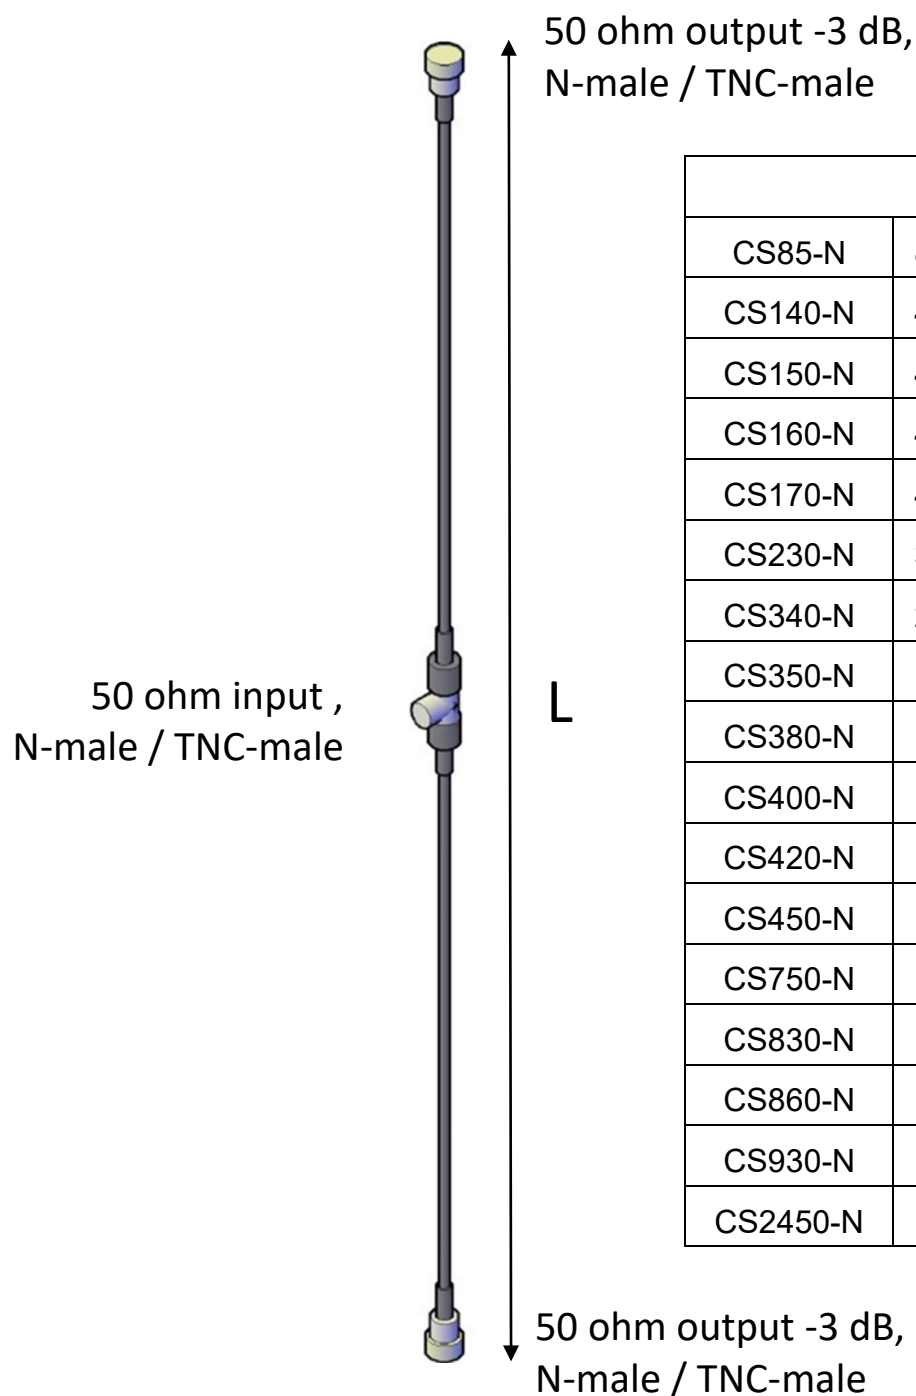

L (mm)			
CS85-N	8130	CS85-TNC	8080
CS140-N	4945	CS140-TNC	4895
CS150-N	4615	CS150-TNC	4565
CS160-N	4330	CS160-TNC	4280
CS170-N	4075	CS170-TNC	4025
CS230-N	3030	CS230-TNC	2965
CS340-N	2060	CS340-TNC	2005
CS350-N	1995	CS350-TNC	1950
CS380-N	1840	CS380-TNC	1800
CS400-N	1765	CS400-TNC	1725
CS420-N	1650	CS420-TNC	1610
CS450-N	1525	CS450-TNC	1485
CS750-N	990		
CS830-N	895		
CS860-N	865		
CS930-N	805		
CS2450-N	745		

Minimum bending radius 31 mm

For proper weather protection all connectors and cable junctions shall be covered by self-fusing tape